



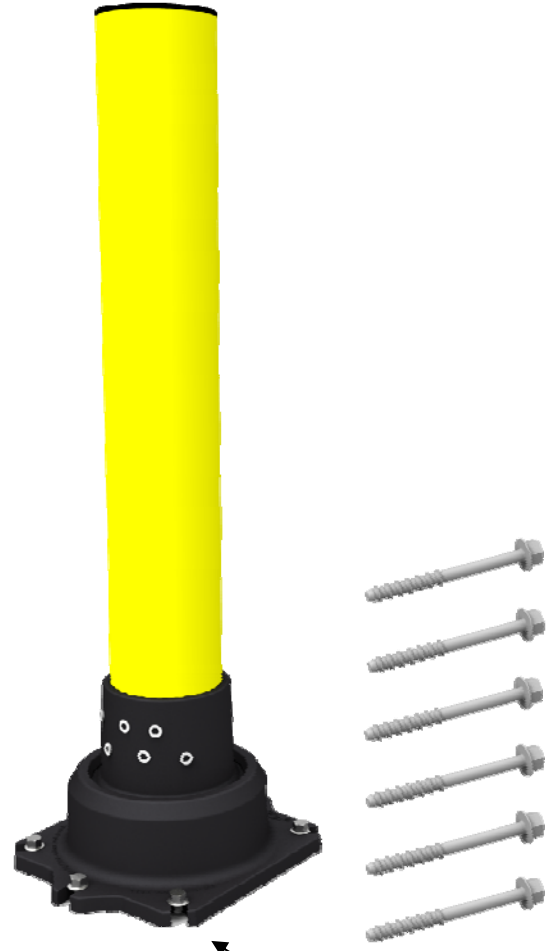

SlowStop® Rebounding Bollard – 5” (SS5Y-42)

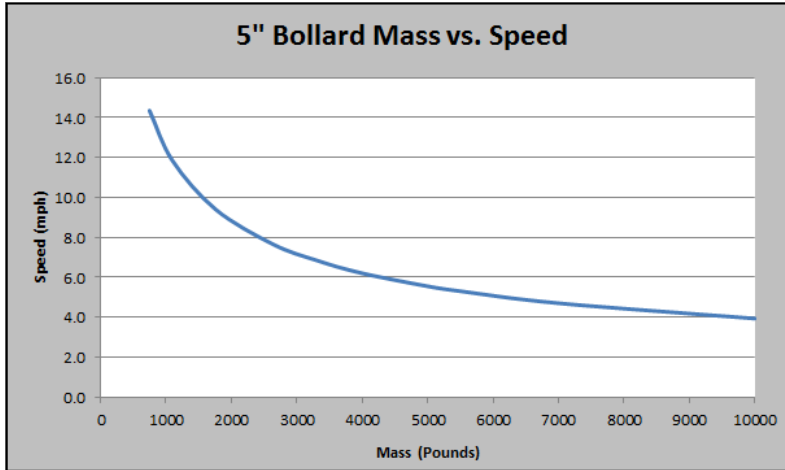

Installs with six (6)
5/8" x 5-1/2"
Concrete Anchor Screws

Color: Standard Yellow Bollard on Black Base

Diameter: 5.56" (5" ANSI Schedule 40)

Height: 42"

Set Screws: 6 M16 x 2.00
8mm Hex

Cap: Black Plastic

SPECIFICATIONS

- Energy Absorption: 7,000 joules / 5,163 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

RECOMMENDED USES

- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Fuel Pump Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use