



SURFACE MOUNT FIXED BASE PERMANENT, SURFACE MOUNTED SQUARE BASE

SPEC-BS-SMF | 06/15/2017

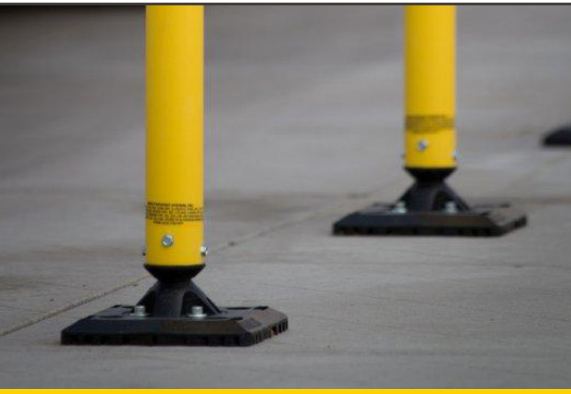

SPECIFICATIONS SHEET

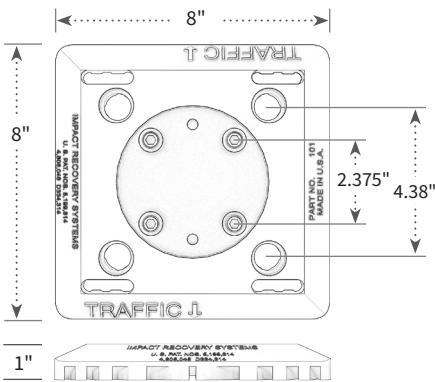

Dimensions

Overall: 8" x 8" x 1"

Hole Pattern: 4.38"

(Center to Center)

Shoulder Bolt Spacing: 2.375"

(Center to Center)

FEATURES

Colors:

- Interchangeable Uprights
- Durable HDPE Plastic
- Resistant to UV Light, Ozone & Hydrocarbons
- Low-Profile Design
- Instantly Operational
- Installs Easily with anchors or epoxy

SPECIFICATIONS

Material: High Density Polyethylene

Hardware: Zinc-plated, socket cap screws & t-nut

Optional Stainless Steel Hardware: Stainless steel screws & t-nuts

Colors: Black, yellow or white

Installation

- **4 anchors** - Impact Traffic anchor kit (recommended)
- **Epoxy**

Upright Support: Supports all Impact Traffic uprights that utilize our *Fixed* spring type.

RECOMMENDED USE

- Permanent applications

Take care to avoid creating a trip hazard when using any sign in the presence of pedestrians. Ensure that sign bases are outside pedestrian travel areas.

PHONE: +1(210) 736-4477

FAX: +1(210)734-6448



www.ImpactRecovery.com

info@ImpactRecovery.com



Impact Recovery Systems, Inc.

4955 Stout Dr.

San Antonio, TX 78219

United States

