




# SlowStop® Rebounding Bollard – 3” (SS3Y-42)



- Color: Standard Yellow Bollard on Black Base
- Diameter: 2.88" (2.5" ANSI Schedule 40)
- Height: 42"
- Set Screws: 5 M12 x 1.75  
6mm Hex
- Cap: Black Plastic

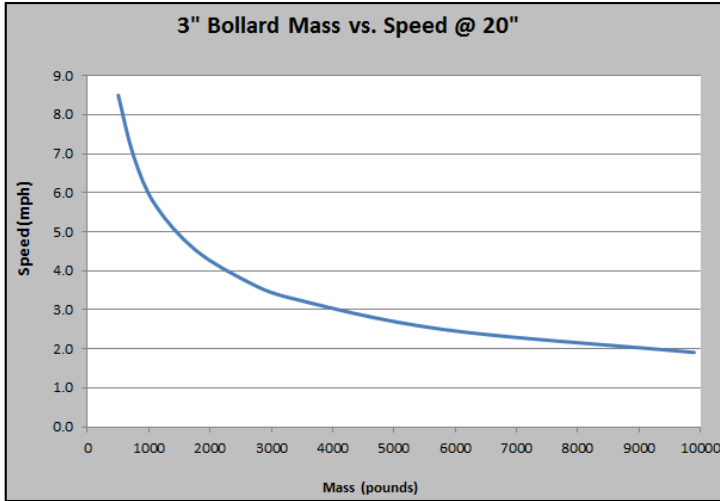

### SPECIFICATIONS

- Energy Absorption: 1,621 joules / 1,195 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

### RECOMMENDED USES

- Rack Guarding
- Equipment Guarding
- Drive-Thru Lanes
- Utility Protection
- Access Denial
- Gas Pump Protection
- Post-Tensioned Concrete
- Not for K-Rated Security Use