





SlowStop® 4" Handicap Parking Bollard (SS4Y-42-HC)

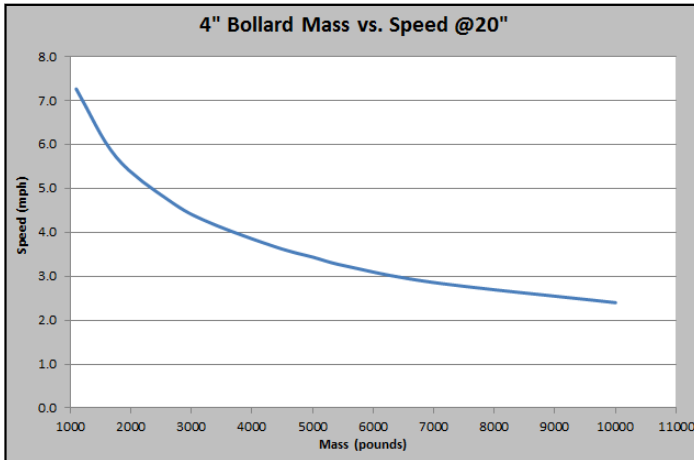

Installs with four (4)
5/8" x 5-1/2"
Concrete Anchor Screws



- Color: Standard Yellow Bollard on Black Base
- Diameter: 4" (3.5" ANSI Schedule 40)
- Bollard Height: 42"
- Sign Height: 60" above ground (ADA)
- Set Screws: 5 M16 x 2.00
8mm Hex
- Fill: Concrete or foam fill by customer

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally friendly water-based KTL coating.
- Engineer grade reflective sheeting on HDPE sign face
- Aluminum post and brackets included
- Van Accessible placard available

RECOMMENDED USES

- Parking lot handicap parking spots
- Sign face can be changed for alternate uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoid trip hazards in pedestrian travel lanes

