




SlowStop® Rebounding Bollard – 4” (SS4Y-42)



Installs with four (4)
5/8" x 5-1/2"
Concrete Anchor Screws

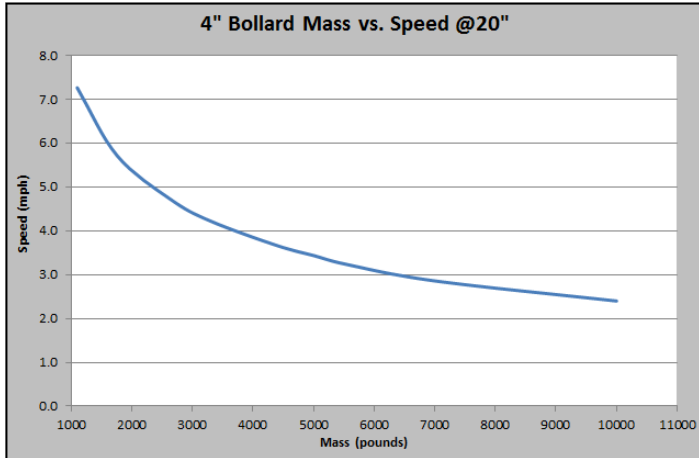

- Color: Standard Yellow Bollard on Black Base
- Diameter: 4" (3.5" ANSI Schedule 40)
- Height: 42"
- Set Screws: 5 M16 x 2.00
8mm Hex
- Cap: Black Plastic

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

RECOMMENDED USES

- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Gas Pump Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use

