




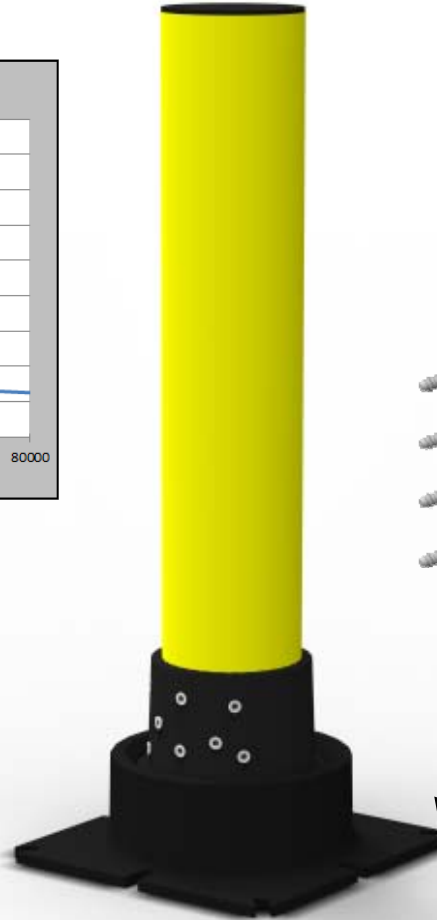

SlowStop® Rebounding Bollard – 6” (SS6Y-42)

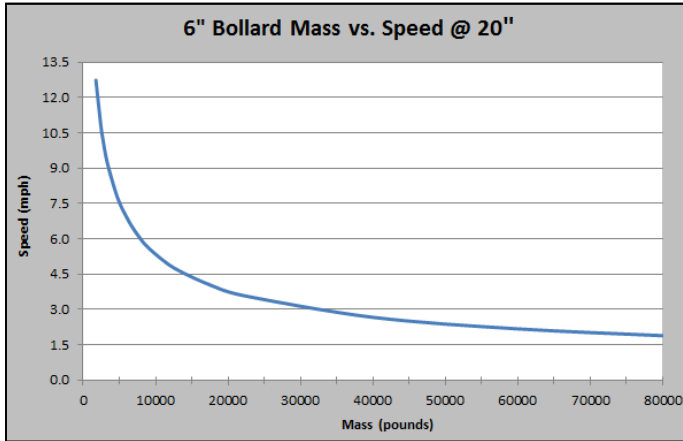

Installs with eight (8)
5/8" x 5-1/2"
Concrete Anchor Screws

Color: Standard Yellow Bollard on Black Base

Diameter: 6.63" (6" ANSI Schedule 40)

Height: 42"

Set Screws: 8 M16 x 2.00
8mm Hex

Cap: Black Plastic

SPECIFICATIONS

- Energy Absorption: 12,934 joules / 9,536 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating.

RECOMMENDED USES

- Loading Docks and Warehouse Entrance Ramps
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Post-tensioned Concrete
- Not for K-Rated Security Use