


HURRICANE EVACUATION ROUTE

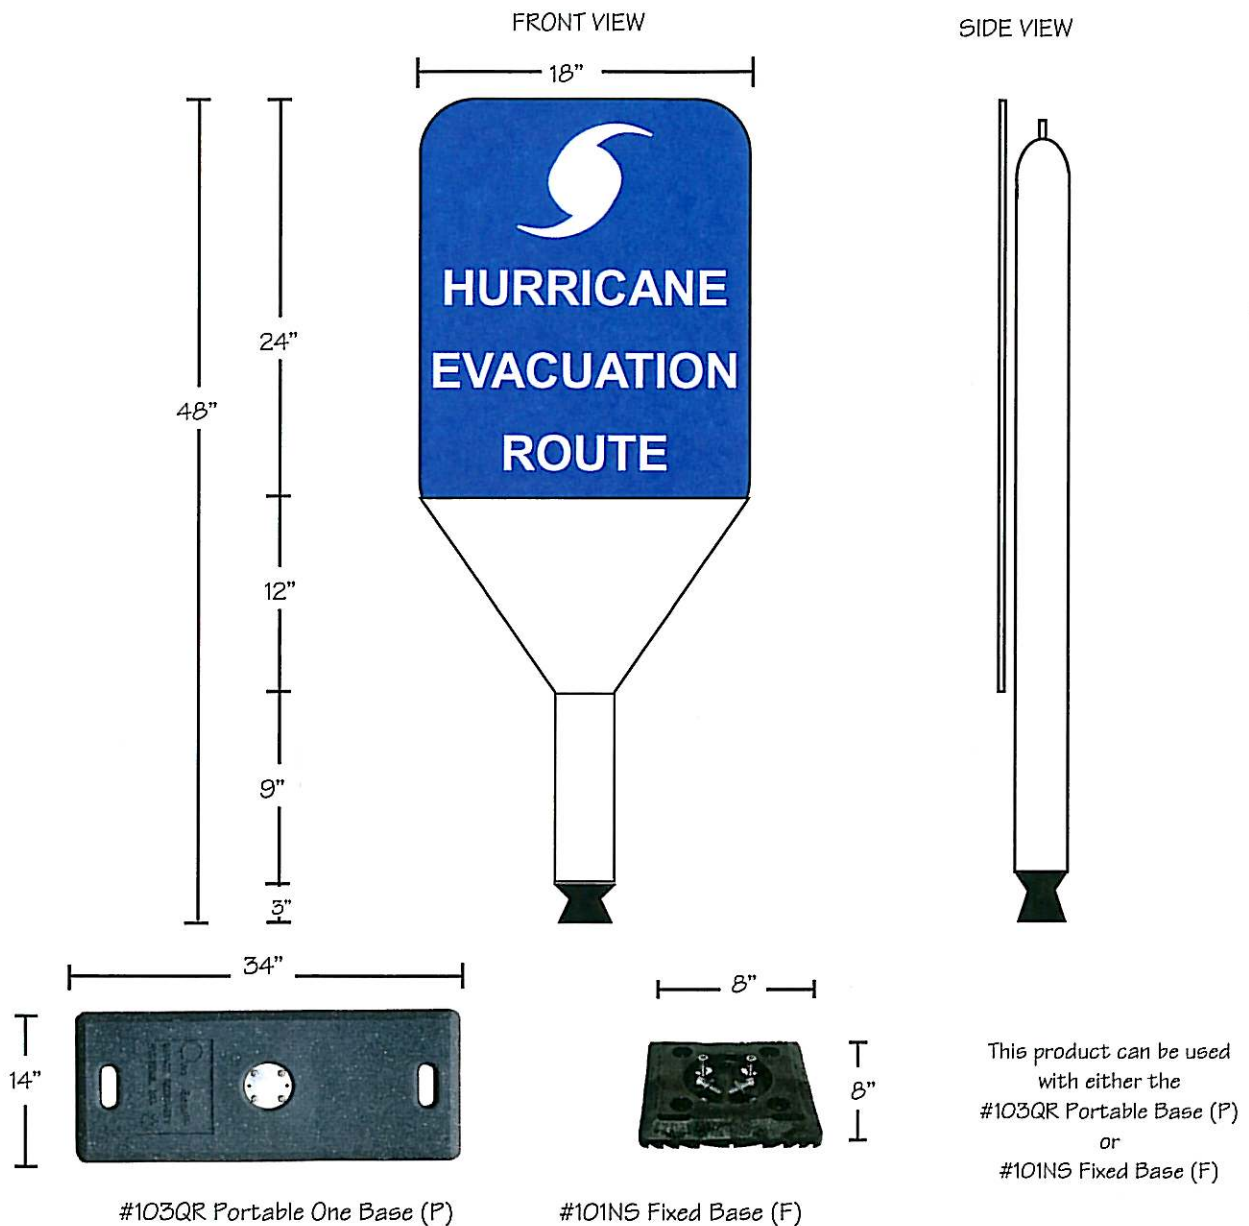

SPECIFICATIONS

- Post and panel is constructed of flexible polyethylene plastic that is resistant to: ultraviolet light, ozone, and hydrocarbons.
- Single Paneled Unit has a reactive spring assembly tested at 145 lb tension with stainless steel cable. Double Paneled unit has a 145 lb. spring.

RECOMMENDED USES

- Ideal for hurricane evacuation routes.

IMPACT recovery
SYSTEMS

"Impacting Today's Roads for a Safer Tomorrow"

246 W. Josephine
San Antonio, TX 78212
(210) 736-4477 (210) 734-6448
Toll Free: (800) 736-5256
www.impactrecovery.com