




Storefront Bollard

PROTECTIVE GUARDING - SLOWSTOP®

SPEC SHEET | P/N **SS5Y-42-SF, SS5S-42-SF**

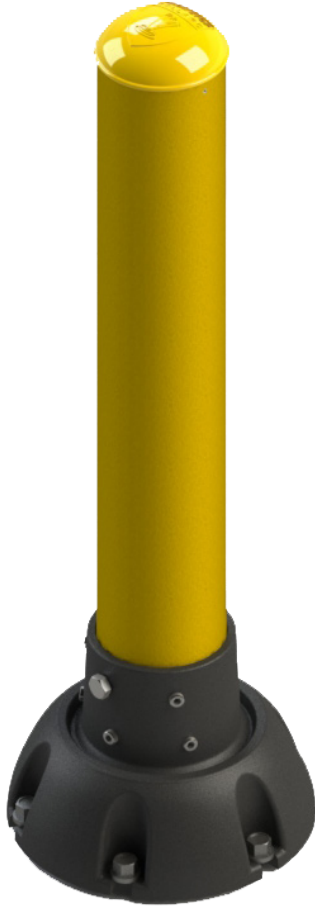

Product Specifications

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal (Stainless Steel Available)
Diameter	5.56" (5" ANSI Schedule 40)
Product Weight	105 lb.
Product Height	42" overall
Impact Rating	ASTM F3016 - S10 - 5,000 pounds @ 10.4 mph
Temperature Rating	-40°F - 150°F
Pipe Coating	60 µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast-Iron Coating	Environmentally Friendly Water-based E-Coat + Polyester Outdoor Powder Coating
Set Screws	Five (5) M16
Anchor Screws	Six (6) 3/4" x 5-1/2" Concrete
Cap	Metal, RAL 1023 Yellow

Recommended Uses

- Storefront parking applications
- For use without costly wheel stops
- Protect rear entrance doors, stairs
- Fire hydrants
- Air stations
- Kiosk protection
- On concrete slabs – min. 6" – 3,000 psi
- Add plastic bollard covers for brand coloring
- Ideal for retrofits

4955 Stout Drive, San Antonio, TX 78219
(210) 736-4477 | 1-800-736-5256 | info@impactrecovery.com

impactrecovery.com

January 2024



©2024 Impact Recovery Systems, Inc.® All rights reserved. Impact Recovery Systems, OneBase, and Tuff Curb are registered trademarks of Impact Recovery Systems, Inc.® SlowStop® is a registered trademark of SlowStop Guarding Systems, LLC.®

The products mentioned in this document are covered by the following U.S. and international patent numbers: 7,195,422 | 7,621,691 | D937,700 | D620,823 | D620,824 | D620,825 | EP 2 267 225 | EP 2 888 412 | 9,938,677 | 11,136,735 | D932,875. Other U.S. and International patents pending.