




# Storefront Bollard Type 2.5

PROTECTIVE GUARDING - SLOWSTOP®

SPEC SHEET | P/N **SS-T2.5Y-100-SF**

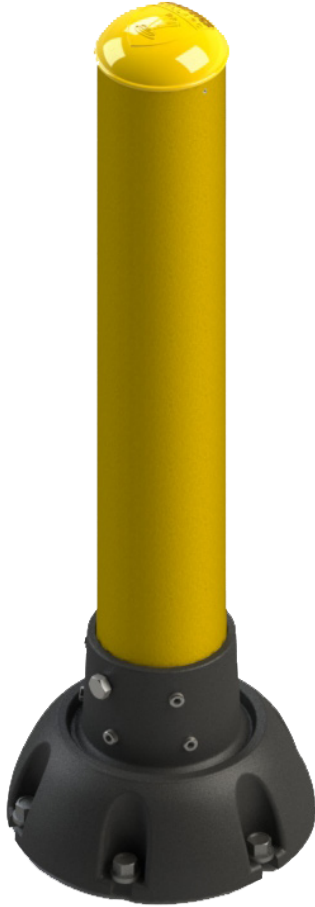

## Product Specifications

Color	RAL 1023 Yellow Pipe on RAL 9005 Black Pedestal (Stainless Steel Available)
Diameter	139, 7 mm
Product Weight	48 kg
Product Height	100 cm
Impact Rating	ASTM F3016 - S10 - 2267 kg @ 16.7 kph
Temperature Rating	-40°C - 70°C
Pipe Coating	60 µm Galvanized + 150 µm Polyester Outdoor Powder Coating
Cast-Iron Coating	Environmentally Friendly Water-based E-Coat + Polyester Outdoor Powder Coating
Set Screws	Five (5) M20 x 163 mm
Anchor Screws	Six (6) 3/4" x 5-1/2" Concrete
Cap	Metal, RAL 1023 Yellow

## Recommended Uses

- Storefront parking applications
- For use without costly wheel stops
- Protect rear entrance doors, stairs
- Fire hydrants
- Air stations
- Kiosk protection
- On concrete slabs – min. 175 mm - C30
- Add plastic bollard covers for brand coloring
- Ideal for retrofits

4955 Stout Drive, San Antonio, TX 78219  
(210) 736-4477 | 1-800-736-5256 | info@impactrecovery.com

[impactrecovery.com](http://impactrecovery.com)

February 2024



©2024 Impact Recovery Systems, Inc.® All rights reserved. Impact Recovery Systems, OneBase, and Tuff Curb are registered trademarks of Impact Recovery Systems, Inc.® SlowStop® is a registered trademark of SlowStop Guarding Systems, LLC.®

The products mentioned in this document are covered by the following U.S. and international patent numbers: 7,195,422 | 7,621,691 | D937,700 | D620,823 | D620,824 | D620,825 | EP 2 267 225 | EP 2 888 412 | 9,938,677 | 11,136,735 | D932,875. Other U.S. and International patents pending.