

SlowStop® Anchor Data

(IM-SS-ANCHOR-5)

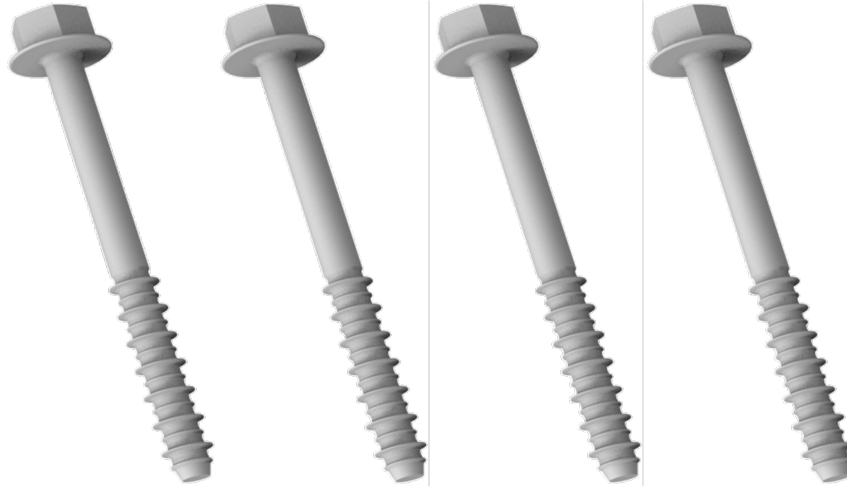


IMAGE FOR REFERENCE ONLY

<u>Characteristic</u>	<u>Symbol</u>	<u>Units</u>	<u>Value</u>
Nominal Diameter	d_a	in.	5/8
Drill Bit Diameter	d_{bit}	in.	5/8
Minimum Embedment Depth	h_{nom}	in.	5
Effective Embedment Depth	h_{eff}	in.	3.88
Minimum Edge Distance	c_{min}	in.	3
Wrench Socket Size	-	in.	15/16
Tension Resistance of Steel	N_{sa}	lb.	24,210
Shear Resistance of Steel	V_{sa}	lb.	11,221
Concrete Breakout Strength Req.	N_{ua}	lb.	12,500

Data above provided by Hilti, Inc.