


1. INSTALL SURFACE MOUNT BASE USING ANCHOR KIT PROVIDED. SEE DIRECTIONS INSIDE KIT. "TRAFFIC" MARKING ON BASE SHOULD BE ORIENTED 90 DEGREES FROM EXPECTED TRAFFIC FOR INCREASED WIND RESISTANCE. ATTACH TO FLAT CONCRETE OR ASPHALT.
2. TIGHTEN THE SET-SCREW IN THE BASE USING A 1/8" ALLEN WRENCH. IF A TAMPER RESISTANT BASE WAS NOT USED, INSERT THE TWO KEEPER PIN INTO THE SLOTS.
3. ATTACH SIGN BRACKETS TO SIGN FACE THROUGH TWO HOLES IN THE SIGN FACE. FULLY TIGHTEN FRONT BOLT. BE SURE TO KEEP THE BRACKET'S CLAMP HOLES ALIGNED VERTICALLY.
4. LOOSEN THE SIGN BRACKET CLAMPS AND SLIDE THE BRACKETS OVER THE SIGN POST. ONCE IN DESIRED POSITION, TIGHTEN CLAMPING HEX BOLTS.

CALL CUSTOMER SERVICE AT 1-800-736-5256 IF YOU HAVE ANY ISSUES. WE'RE HAPPY TO HELP.

SEARCH "IMPACT RECOVERY SYSTEMS" ON YOUTUBE.COM OR USE THE QR CODE BELOW FOR OUR SURFACE MOUNT BASE INSTALLATION INSTRUCTIONS.

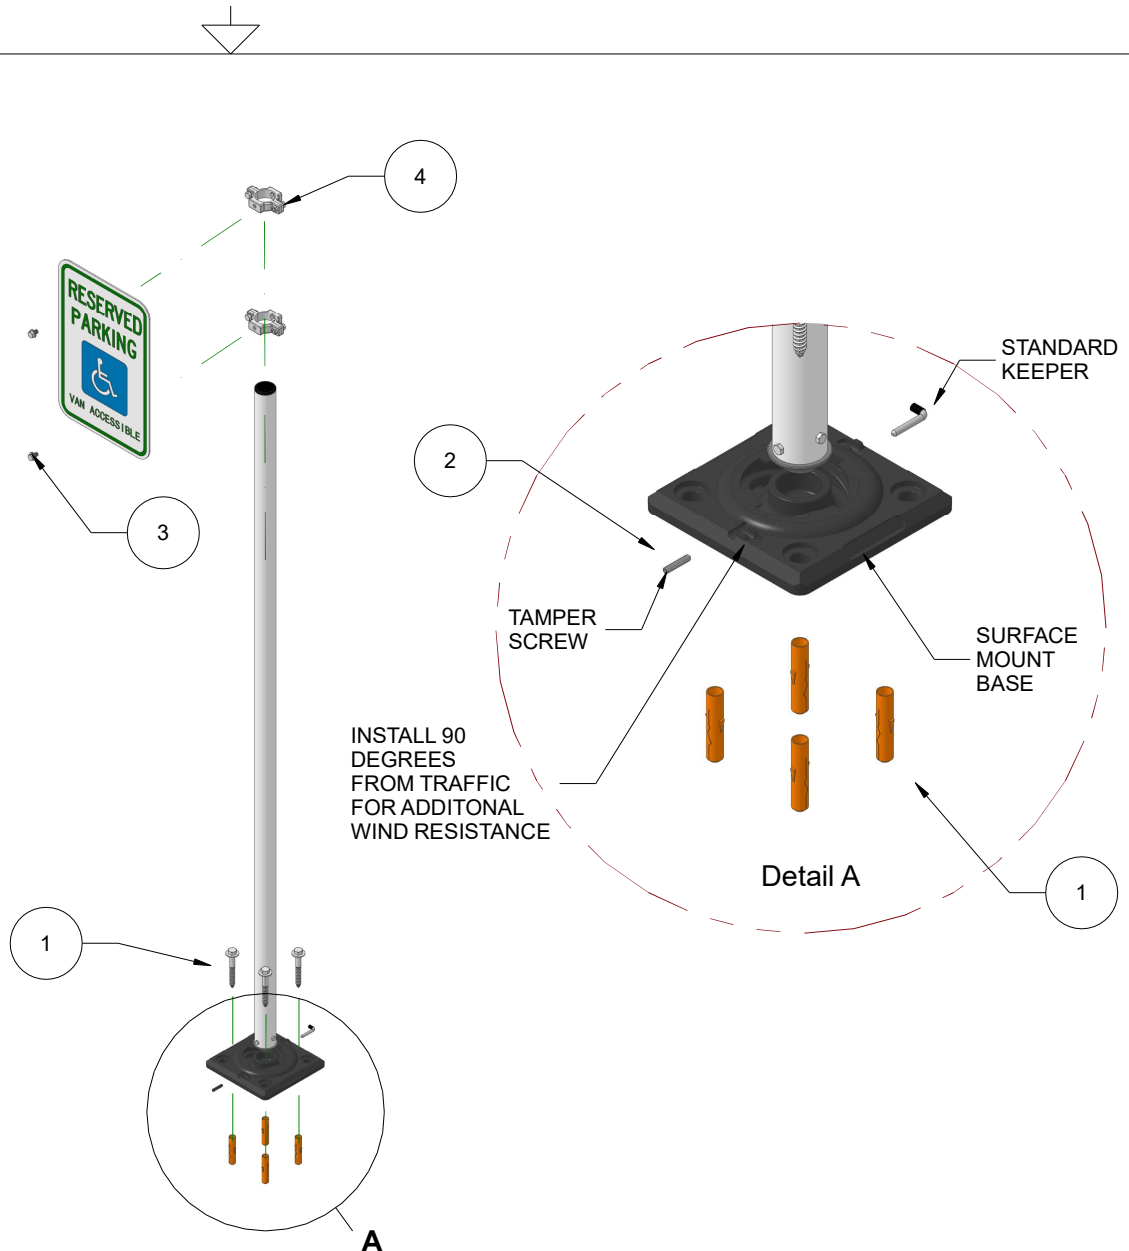

CONFIDENTIAL & PROPRIETARY

The drawing on this print and the information therewith are property of Impact Recovery Systems, Inc., and shall not be used or discussed in whole or in part without the consent of Impact Recovery Systems, Inc.

4955 STOUT DR. · SAN ANTONIO, TX 78219 · (800) 736-5256

SIZE
A

PART NO.
STR0-78xQT-QTB

DWG.
STA-RITE 78" SIGN POST

REV
1.0

SCALE

IMPACT RECOVERY SYSTEMS, INC.

DATE 21-AUG-2024